DISPLAY TR7



Self-contained exit sign luminaire with wireless AirBUS monitoring. Available in 3 h and 8 h duration variants.

Specifications

Ingress protection	IP40
Protection class	I
Housing material	Aluminium (Aluminium-Strangguss)
Colour / finish	RAL 9016 · traffic white
Ambient temperature	+5 °C … +50 °C
Supply voltage	230 V ± 10 %, 50/60 Hz
Communication	AirBUS
Impact resistance	IK04
Viewing distance	31 m
Connection power	9 VA
Light source	LED
Battery	3.2 V / 3000 mAh · LiFePO4
Rated duration	3 h / 8 h


Mounting variants

TR7U · Universal mounting · 334 × 234 × 38 mm

TR7E · Recessed mounting · 371 × 177 × 68 mm
Cut-out / installation space: 336 × 51 mm; max. 35 mm; min. 90 mm

TR7U · Pendel · Pendant mounting · ≤ 2 m

TR7U · Seil · Wire suspension · ≤ 6 m

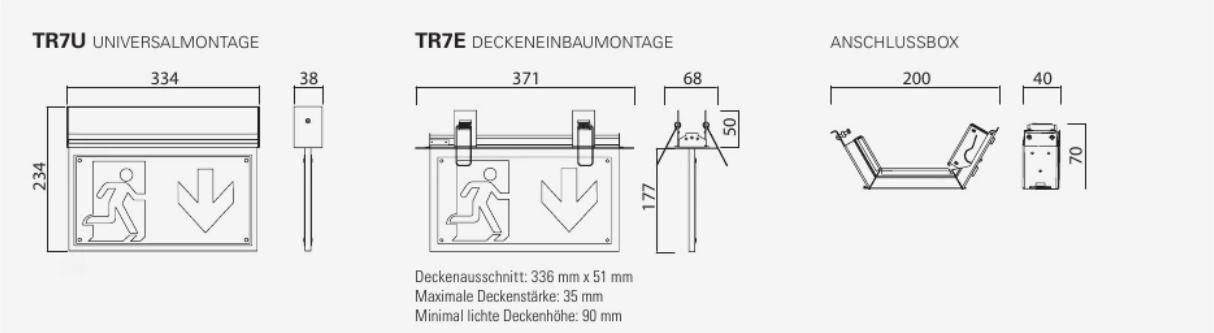

The drawing shows catalogue dimensions. It is not a drilling template or wiring instruction.

Source: Gessler AirBUS · 04/2026 · Page 5

wiki.emlum.com · 2026-11-06