
SUB-LED SL4

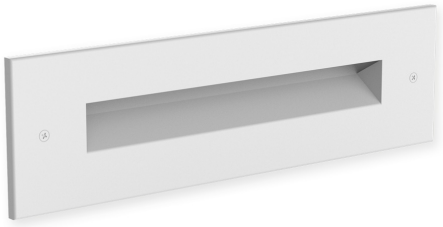

Recessed wall and step luminaire. Original data sheet, product image and photometric file.

Specifications

Ingress protection	IP65
Protection class	I
Housing material	Sheet steel
Colour / finish	Stainless steel; RAL 9005 or RAL 9016 (fine texture / matt)
Ambient temperature	-20 °C … +40 °C
Supply voltage	220-240 V AC, 50/60 Hz; 176-275 V DC
Connection power	10,0 VA / 5,5 W (AC/DC)
Light source	LED 3000 K

Mounting variants

SL4 · Recessed mounting · 250 × 75 × 65 mm
Cut-out / installation space: 240 × 60 × 95 mm; 5-40 mm

The drawing shows catalogue dimensions. It is not a drilling template or wiring instruction.

wiki.emlum.com · 2026-11-06