LED-SPOT TM5D / TM5E



Self-contained emergency luminaire with AirBUS communication. Available in 3 h and 8 h duration variants.

Specifications


Ingress protection	IP20
Protection class	I
Housing material	Sheet steel
Colour / finish	RAL 9016 · traffic white
Ambient temperature	+5 °C … +50 °C
Supply voltage	230 V ± 10 %, 50/60 Hz
Communication	AirBUS
Impact resistance	IK04
Connection power	9 VA
Light source	LED
Battery	3.2 V / 3000 mAh · LiFePO4
Rated duration	3 h / 8 h

Mounting variants

TM5D · Ceiling mounting · 122 × 122 × 28 mm

TM5E · Recessed mounting · 80 × 80 × 28 mm
Cut-out / installation space: Ø 68 mm; max. 35 mm; min. 90 mm

TM5 · Pendel · Pendant mounting · ≤ 2 m

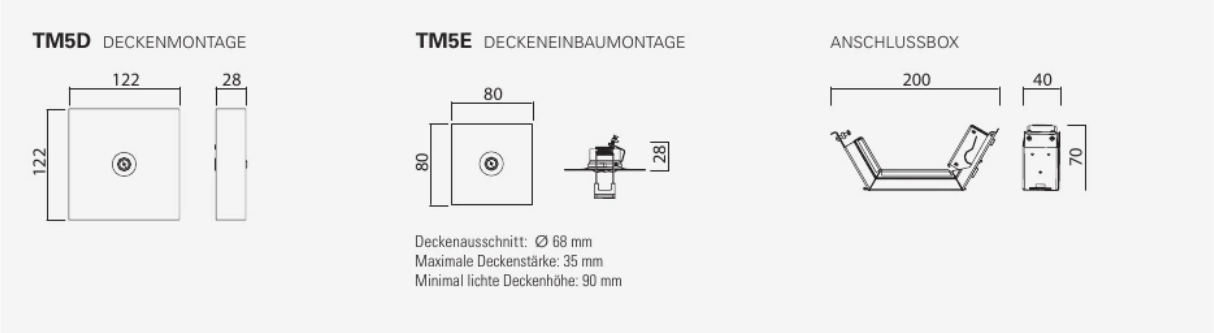

The drawing shows catalogue dimensions. It is not a drilling template or wiring instruction.

Source: Gessler AirBUS · 04/2026 · Page 6

wiki.emlum.com · 2026-11-06